

## Series KLH11



## Humidity Control KLH11

FTPT05-0011\_121001



### FEATURES:

- Humidifying or dehumidifying control.
- One input probe (probe type selectable by parameter).
- Output to one SPDT relay.
- Error indication and fault function: 50 % cycle.
- Easy access to parameters by code.

### SPECIFICATIONS:

#### Panel mounting

Cutout: 71 x 29 mm (2.79 x 1.14 inch)

#### Dimensions

Front: 76,5 x 36 mm (3.01 x 1.41 inch)

Depth: 60 mm (2.36 inch)

#### Measurement range

0 to 100 % RH

#### Accuracy

+/- 1% RH

#### Resolution

1%

#### Probe

(0 - 1V) / (0 - 3V) / (4 - 20mA) Probe

#### Output

SPDT Relay Resistive load 16A

1HP 240Vac -- 10FLA, 60LRA 250Vac


#### IP Protection

Front: IP64

Back: IP20

### HOW TO ORDER:

MODELS: KLH11-G230




Options: Ask to factory

### AVAILABLE MODELS:

- KLH11-G230
- KLH11-G110

### WIRING CONNECTIONS:

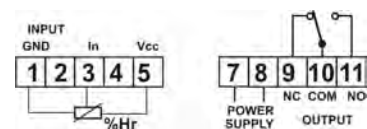

### HEADQUARTERS

Poligono Empresarium. C/Lentisco, 15.  
50720 La Cartuja Baja. Zaragoza. (Spain).  
Tel: +34 976 429 099 · Fax: +34 976 593 532.  
E-mail: keld@keld.es · web: www.keld.es  
GPS: N 41.5863 W 0.82531



### Keld México

Av. Chapultepec No. 148.  
Col. Roma C.P. 06700.  
Del Cuauhtemoc, México D.F.

### Keld China. Jiaxing factory:

D-1 #4 Building. No289 Muyang RD.  
Jiaxing Economic Develop Zone.  
Jiaxing. China.