

## Series KLT01



## Temperature Indicator KLT01

FTPT01-003I\_121001



### FEATURES:

- Powered directly from the mains.
- One input probe.
- 3 digits (without tenths).
- Probe type NTC or PTC depending on model.
- Red, green or blue display depending on model.
- Error probe indication.
- Connection by screw terminal blocks.

### SPECIFICATIONS:

#### Panel Mounting

Cutout: 71 x 29 mm (2.79 x 1.14 inch)

#### Dimensions

Front: 76,5 x 36 mm (3.01 x 1.41 inch)

Depth: 62 mm (2.44 inch)

#### Operating Temperature

-50°C to 150°C / -58°F to 302°F

#### Accuracy

Better than 1% of full scale

#### Resolution

1°

#### Probe


PTC (1000 Ohms, 25°C) or NTC depending on model

#### IP Protection

Front: IP64

Rear: IP20


### HOW TO ORDER:

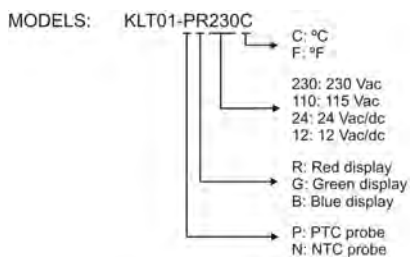

### AVAILABLE MODELS:

- KLT01-NR230C
- KLT01-NR110C

### WIRING CONNECTIONS:



### HEADQUARTERS

Polígono Empresarium. C/Lentisco, 15.  
50720 La Cartuja Baja. Zaragoza. (Spain).  
Tel: +34 976 429 099 · Fax: +34 976 593 532.  
E-mail: keld@keld.es · web: www.keld.es  
GPS: N 41.5863 W 0.82531



### Keld México

Av. Chapultepec No. 148.  
Col. Roma C.P. 06700.  
Del Cuauhtemoc, México D.F.

**Keld China.** Jiaxing factory:  
D-1 #4 Building. No289 Muyang RD.  
Jiaxing Economic Develop Zone.  
Jiaxing. China.